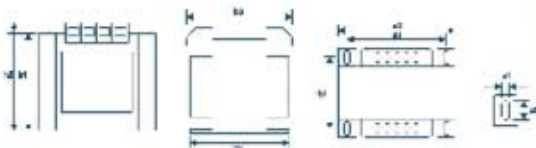


*Relaciones de tensión y potencia standard*

| Código               | Potencia en VA | Primario en Volts | Secundario en Volts |
|----------------------|----------------|-------------------|---------------------|
| TMP 50 / 110 – 220   | 50 VA          | 220 / 380 Vca     | 110 – 110 Vca       |
| TMP 50 / 24 – 48     | 50 VA          | 220 / 380 Vca     | 24 – 24 Vca         |
| TMP 150 / 110 – 220  | 150 VA         | 220 / 380 Vca     | 110 – 110 Vca       |
| TMP 150 / 24 – 48    | 150 VA         | 220 / 380 Vca     | 24 – 24 Vca         |
| TMP 300 / 110 – 220  | 300 VA         | 220 / 380 Vca     | 110 – 110 Vca       |
| TMP 300 / 24 – 48    | 300 VA         | 220 / 380 Vca     | 24 – 24 Vca         |
| TMP 500 / 110 – 220  | 500 VA         | 220 / 380 Vca     | 110 – 110 Vca       |
| TMP 500 / 24 – 48    | 500 VA         | 220 / 380 Vca     | 24 – 24 Vca         |
| TMP 750 / 110 – 220  | 750 VA         | 220 / 380 Vca     | 110 – 110 Vca       |
| TMP 750 / 24 – 48    | 750 VA         | 220 / 380 Vca     | 24 – 24 Vca         |
| TMP 1000 / 110 – 220 | 1000 VA        | 220 / 380 Vca     | 110 – 110 Vca       |
| TMP 1000 / 24 – 48   | 1000 VA        | 220 / 380 Vca     | 24 – 24 Vca         |

*Dimensiones en mm.*


| TMP  | a1  | a2  | b1  | b2  | b3  | h1  | h2  | p1  | p2 |
|------|-----|-----|-----|-----|-----|-----|-----|-----|----|
| 50   | 71  | 86  | 53  | 70  | 97  | 75  | 84  | 5   | 8  |
| 150  | 96  | 115 | 69  | 93  | 106 | 99  | 105 | 6   | 10 |
| 300  | 103 | 126 | 73  | 99  | 113 | 106 | 112 | 7   | 10 |
| 500  | 125 | 151 | 90  | 115 | 125 | 129 | 132 | 7,7 | 10 |
| 750  | 125 | 151 | 110 | 135 | 145 | 129 | 132 | 7,7 | 10 |
| 1000 | 159 | 192 | 111 | 147 | 139 | 164 | 164 | 8   | 12 |